

TECHNICAL & COMMERCIAL PROPOSAL

185.4 kWp Rooftop Solar PV System

299 × 620 Wp solar panels | 2 × 80 kW grid-tied inverters | zero export, no battery

PREPARED FOR

Kampala Marriott Hotel

Mezzanine roof, Kampala, Uganda

0°18'11.34"N, 32°35'13.76"E

PREPARED BY

NileSun Power Ltd

Contact: Mahil Fernando

Tel: +256 708669574 | +94 773 55 96 82

Email: sales@nilesunpower.com

Ref: NSP-261105-KMH | 05-Nov-2026

Valid until 05-Dec-2026 | Clean Energy - Brighter Tomorrow

185.4 kWp Grid-Tied Rooftop Solar PV System

Kampala Marriott Hotel – mezzanine roof | 299 × 620 Wp panels | 2 × 80 kW inverters

Quote & Client Details

Quote No.	NSP-261105-KMH	Date	05-Nov-2026	Valid Until	05-Dec-2026
Client Name	Kampala Marriott Hotel	Contact No.		Client Email	
Site Address	Kampala Marriott Hotel, mezzanine roof, Kampala	Supply Type	Three-phase 400 V, UEDCL, main LV switchboard	VAT TIN No.	_____

185.4 kWp	**160 kW**	**299 nos**	**USD 121,115**
Solar array capacity	Inverters (2 × 80 kW)	620 Wp solar panels	Turnkey price excl. VAT
752 kWh	**274.4 MWh**	**USD 19,212**	**6.1 years**
Avg. daily generation	Est. annual generation	Savings in year 1	Payback period

1. Executive Summary

NileSun Power Ltd is pleased to submit this proposal for the design, supply, installation and commissioning of a **185.4 kWp grid-tied rooftop solar PV system** on the mezzanine roof of the **Kampala Marriott Hotel**: **299 × 620 W N-type bifacial solar panels** on a ballasted aluminium structure at 10° tilt, with **two 80 kW three-phase string inverters** connected to the hotel's main LV switchboard.

The array generates about **274,362 kWh per year** (approx. 752 kWh/day). The hotel uses about 1,000,000 kWh per month, so every solar kWh is used on site (zero export) and directly reduces grid purchases. At USD 0.070/kWh this saves about **USD 19,212 in the first year**. The turnkey price is **USD 121,115** (excl. VAT), paid back in about **6.1 years**, with an IRR of **16.6 %** (Sections 12 and 14).

Key Benefits

- Lower bills: solar energy covers part of the hotel's daytime load at USD 0.052/kWh versus USD 0.070/kWh from the grid.
- Fast payback (6.1 years) and USD 569,043 net savings over 25 years.
- No roof penetrations: ballasted structure within the architect's solar zone (drawing D18102-DD-A-104).
- Zero-export control: no power is fed back to the UEDCL grid; no battery needed.
- Long life: Astronergy N-type bifacial panels (15-year product, 30-year power warranty); remote monitoring of generation and savings.

2. Equipment Schedule (Bill of Materials)

#	Item	Specification	Qty	UoM
1	Solar panels	Astronergy ASTRO N7 CHSM66RN(DG)/F-BH 620 Wp N-type TOPCon bifacial, 2382 × 1134 × 30 mm (Annex 4)	299	pcs
2	String inverters	Sigenergy Sigen PV 80M1, 80 kW three-phase, 1100 V DC, with monitoring (Annex 3)	2	pcs
3	Mounting structure	Enerack ballasted aluminium system, 10° tilt, 6 × 2P + 1 × 1P tables, no roof penetration (Annex 5)	1	system
4	DC protection	DC switch-disconnectors 1000 V 32 A (1 per string), surge protection	16	pcs
5	AC combiner panel	250 A, MCCBs 2 × 125 A + 250 A outgoing, AC surge protection, roof isolator	1	set
6	Grid connection	New 250 A MCCB way on the existing main LV switchboard	1	set
7	Cabling	Solar cable 6 mm², AC 4C × 50 mm² and 4C × 120 mm² XLPE/SWA, cable tray	1	lot
8	Monitoring & control	Smart data logger, energy meter + CTs, zero-export control	1	set
9	Earthing	Array bonding, connection to building earth and lightning protection	1	set


3. Solar Array & Inverters

Solar array	Value
Panels	299 × 620 W = 185.4 kWp
Arrangement	7 tables: 6 × 2P×23, 1 × 1P×23 (portrait)
DC / AC ratio	185.4 kWp / 160 kW = 1.16
Location / tilt	Flat concrete mezzanine roof, 10°
Panel area	approx. 808 m² (299 panels)

Inverters	Value
INV-01	152 panels = 94.2 kWp, 8 strings × 19
INV-02	147 panels = 91.1 kWp, 3 × 19 + 5 × 18
AC output	2 × 80 kW, 400 V 3N~
Connection	AC combiner → MLVS (≈ 80 m)
Export	Zero export (meter + CTs)


4. Estimated Energy Generation

Based on long-term average irradiation for Kampala and a system performance of about 80 %. Annual total: **274,362 kWh** (specific yield ≈ 1,480 kWh/kWp).

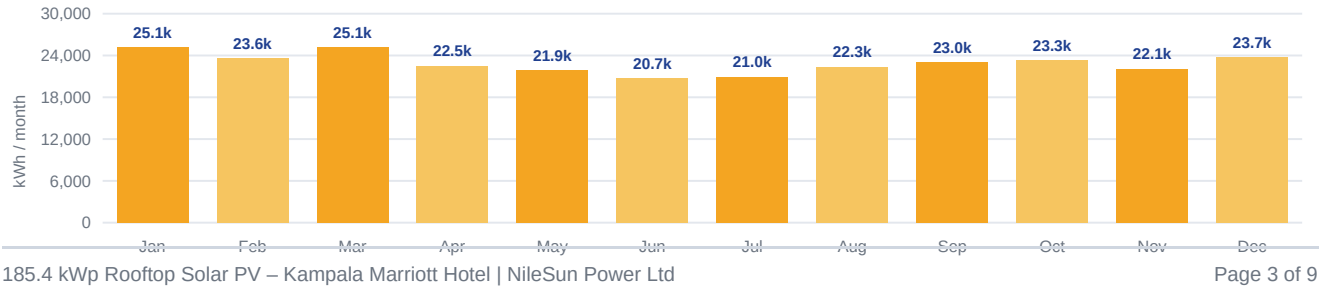

5. Design Solar Top Installation (Roof Plan)

The 299 panels are placed only inside the architect's solar zone on the mezzanine roof (drawing D18102-DD-A-104), on 7 Enerack ballast tables at 10° tilt with 800 mm service aisles. INV-01 feeds tables T1–T4 (part), INV-02 feeds T4 (part)–T7. The inverter station and AC combiner panel sit at the south-east corner; the AC cable runs to the main LV switchboard via the building riser.

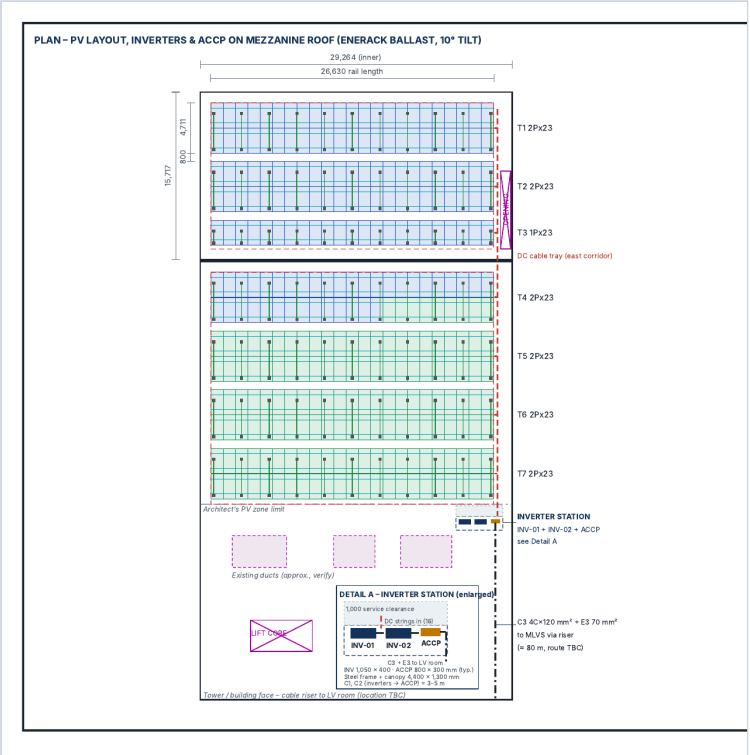

6. Site Location



Proposed solar installation – Kampala Marriott Hotel, mezzanine roof (0°18'11.34"N, 32°35'13.76"E)


7. Hotel Load & Solar Contribution

The hotel uses about **1,000,000 kWh per month (≈ 12 GWh per year)**. The solar system supplies about **2.3 %** of this, so all solar output is consumed on site even on low-occupancy days – no export and no battery are needed.

Item	Value	Check	Result
Hotel annual consumption	≈ 12,000,000 kWh	Solar share of consumption	2.3 %
Solar generation, year 1	274,362 kWh	Peak solar output	≈ 97 kW (midday average)
Hotel daytime demand	far above solar output	Energy exported	0 kWh (zero export)
Grid tariff (avoided)	USD 0.070/kWh, +2 %/yr	Every solar kWh used?	Yes – offsets grid purchase


8. Solar Generation by Time-of-Use Band

Average daily solar output by hour. Almost all generation falls in the shoulder period (06:00–18:00), when the hotel's air-conditioning, kitchen and laundry loads are high.

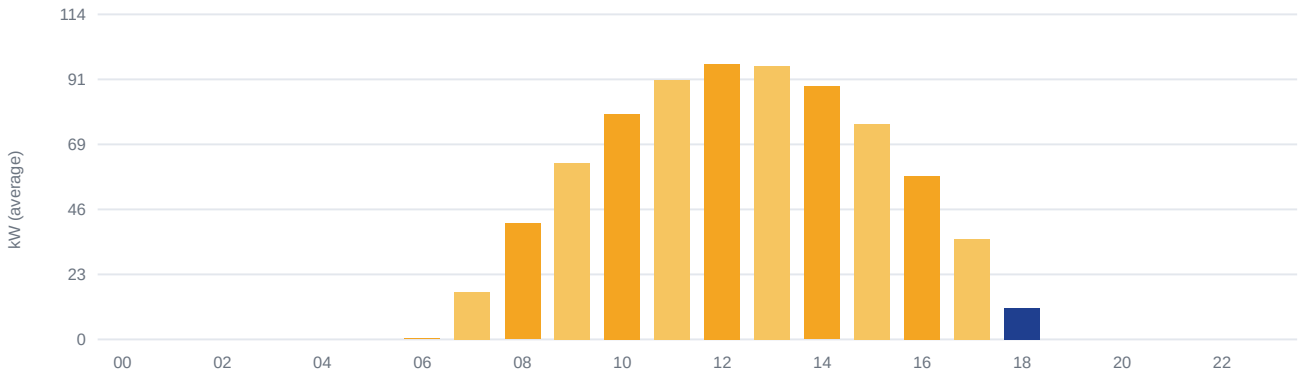

TOU band	Hours	Hotel consumption (kWh/yr)	Solar energy (kWh/yr)	Share of solar	Reduction of band purchase
Off-peak	00:00–06:00	2,089,647	0	0.0 %	0.0 %
Shoulder	06:00–18:00	6,954,383	270,333	98.5 %	3.9 %
Peak	18:00–24:00	2,955,970	4,030	1.5 %	0.1 %
Total		**12,000,000**	**274,362**	**100 %**	**2.3 %**

9. System Connection Diagram

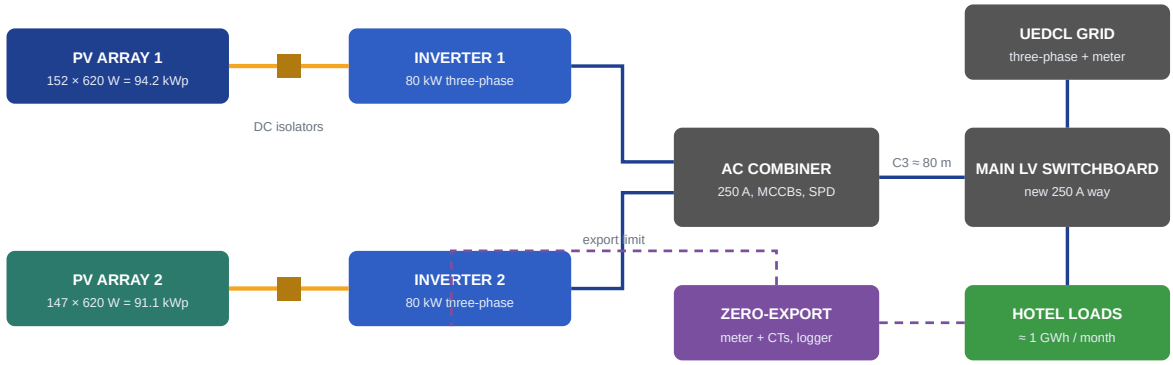

All frames, structures and enclosures are earthed; surge protection on the DC and AC sides. Full single-line diagram in Annex 1.

10. Implementation Schedule

Phase	Activity	Duration
1. Site survey & design	Roof and LV switchboard survey, detailed design, structural sign-off, approvals	Weeks 1–3
2. Procurement	Ordering, shipping (Mombasa), customs clearing, delivery to site	Weeks 2–10
3. Installation	Ballast structure, panels, inverters, AC combiner, cabling & earthing	Weeks 10–13
4. Commissioning	Testing, zero-export setting, monitoring set-up, grid synchronisation	Weeks 13–14
5. Training & handover	Operator training, as-built drawings and O&M manual	Week 14

11. Warranty & After-Sales Support

Component	Warranty
Solar panels	15 yrs product / 30 yrs linear power
Inverters	5 years (extendable)
Mounting structure	10 years
Installation workmanship	2 years


Installed to IEC solar installation standards and Uganda Electricity Regulatory Authority requirements. After handover we provide remote monitoring support, a free 6-month check-up visit and optional annual maintenance (panel cleaning, connection checks, inverter software updates, performance report).

12. Financial Analysis & Cash Flow

Assumption	Value
Turnkey investment (excl. VAT)	USD 121,115
Avoided tariff, year 1	USD 0.070/kWh
Tariff escalation	2 % per year
Degradation	≈ 0.4 % per year
Inverter replacement	USD 9,600 in year 12
O&M cost / discount rate	none assumed / 10 %

Result	Value
Year-1 savings	USD 19,212
Simple payback	6.1 years
IRR (25 years)	16.6 %
NPV @ 10 %	USD 71,221
LCOE (solar energy cost)	USD 0.052/kWh
25-year net savings	USD 569,043

Cumulative cash flow (USD) – the investment is recovered during year 7.

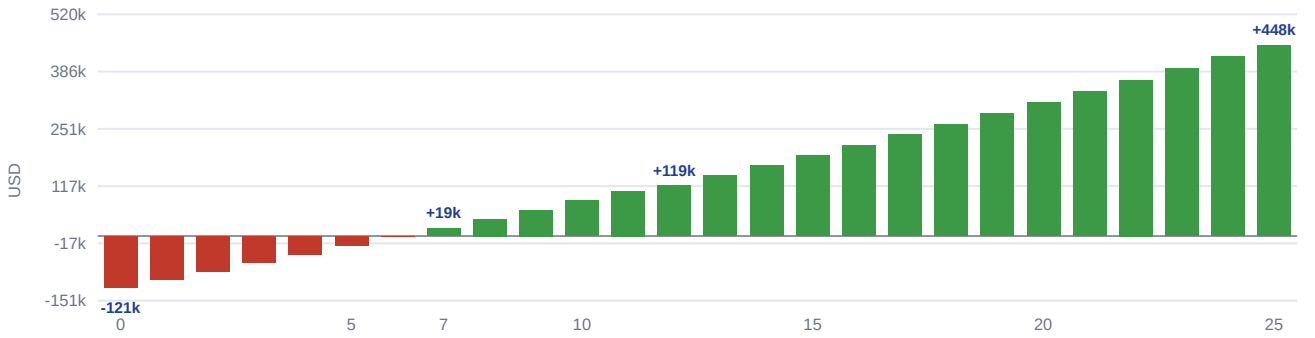

Year	Generation (kWh)	Tariff (USD/kWh)	Savings (USD)	Net cash flow (USD)	Cumulative (USD)
0				(121,115)	(121,115)
1	274,362	0.070	19,212	19,212	(101,903)
3	269,450	0.073	19,630	19,630	(62,951)
5	267,299	0.076	20,260	20,260	(22,749)
6	266,230	0.077	20,582	20,582	(2,167)
7	265,165	0.079	20,910	20,910	18,744
10	261,996	0.084	21,925	21,925	83,492
12	259,904	0.087	22,628	13,028	118,795
15	256,797	0.092	23,726	23,726	188,864
20	251,702	0.102	25,676	25,676	313,284
25	246,708	0.113	27,786	27,786	447,928

Year 12 includes the USD 9,600 inverter replacement. Values in brackets are negative (investment not yet recovered).

13. Quotation for 185.4 kWp Rooftop Solar PV – Turnkey EPC

Quote No.	NSP-261105-KMH	Date	05-Nov-2026	Valid Until	05-Dec-2026
Client	Kampala Marriott Hotel	Contact	Mahil Fernando	Currency	USD

#	Scope of supply & works	Qty	Unit	Price (USD)
1	PV modules – Astronergy ASTRO N7 620 Wp bifacial N-type TOPCon	299	nos	**USD 121,115**
2	String inverters – Sigenergy Sigen PV 80M1, 80 kW, 1100 V	2	nos	
3	Ballasted aluminium mounting structure, 10° tilt	1	lot	
4	DC system – PV cable, connectors, string isolators, cable tray	1	lot	
5	AC system – AC combiner panel, MCCBs, cabling to main LV switchboard	1	lot	
6	Smart data logger, remote monitoring & zero-export control	1	set	
7	Earthing & lightning protection integration	1	lot	
8	Installation, testing & commissioning	1	lot	
9	Transport, logistics & customs clearing to site	1	lot	
	TOTAL TURNKEY EPC PRICE (excluding VAT and other applicable taxes)			**USD 121,115**

Equivalent to USD 0.65 per Wp. Amount in words: One hundred twenty-one thousand one hundred fifteen US Dollars only.

Payment terms	30 % advance with PO · 60 % on delivery of main equipment to site · 10 % on commissioning
Delivery	Equipment 8–10 weeks from PO and advance; installation & commissioning ≈ 4 weeks after delivery
Taxes	VAT, withholding tax and statutory levies excluded – charged as applicable
Exclusions	Roof strengthening / waterproofing, battery storage, utility and permit fees, works not listed above
Client to provide	Roof access, spare 250 A way on the main LV switchboard, power & water during installation

14. Financial Summary & Payback

USD 121,115 Total investment (excl. VAT)	**USD 19,212** Savings in year 1	**6.1 years** Payback period	**16.6 %** IRR (25 years)
USD 578,643 25-year savings	**USD 569,043** 25-year net savings	**4.7 x** Net savings / investment	**USD 71,221** NPV @ 10 %

15. Tariff Sensitivity

Avoided tariff (USD/kWh)	Year-1 savings (USD)	Payback (years)	IRR	NPV @ 10 % (USD)
0.05	13,718	8.4	11.5 %	15,349
0.06	16,462	7.1	14.1 %	43,253
0.07	**19,205**	**6.1**	**16.6 %**	**71,158**
0.08	21,949	5.4	19.0 %	99,062
0.09	24,693	4.8	21.4 %	126,967
0.10	27,436	4.3	23.8 %	154,871

The project remains attractive over a wide tariff range. The break-even tariff (NPV = 0 at 10 %) is about **USD 0.0445/kWh** – roughly 36 % below today's tariff.

Annexes

Annex	Title	Page
Annex 1	Single-line diagram – PV system & grid connection	10
Annex 2	Solar PV layout – mezzanine roof	11
Annex 3	Data sheet – Sigenergy Sigen PV inverter (80 kW)	12–13
Annex 4	Data sheet – Astronergy ASTRO N7 620 W bifacial solar module	14–15
Annex 5	PV structural drawing – Enerack ballast system	16–17
Annex 6	Quotation – 185.4 kWp rooftop solar PV (one page)	18

Next Steps

1. Review of this proposal and clarification meeting with the hotel's engineering team.
2. Site survey: roof condition, LV switchboard, cable route and inverter location.
3. Confirmation of the tariff from recent utility bills and structural review of the roof.
4. Purchase order and advance payment – project start.

Thank you for considering NileSun Power Ltd. Clean Energy - Brighter Tomorrow.