
ROOFTOP PV LAYOUT – CAD PLOT (all layers)

Kampala Marriott Hotel – mezzanine roof · 185.4 kWp · plotted from PV_Layout_Enerack_10deg.dxf (units mm, origin = inner NW corner of upper roof) · NTS

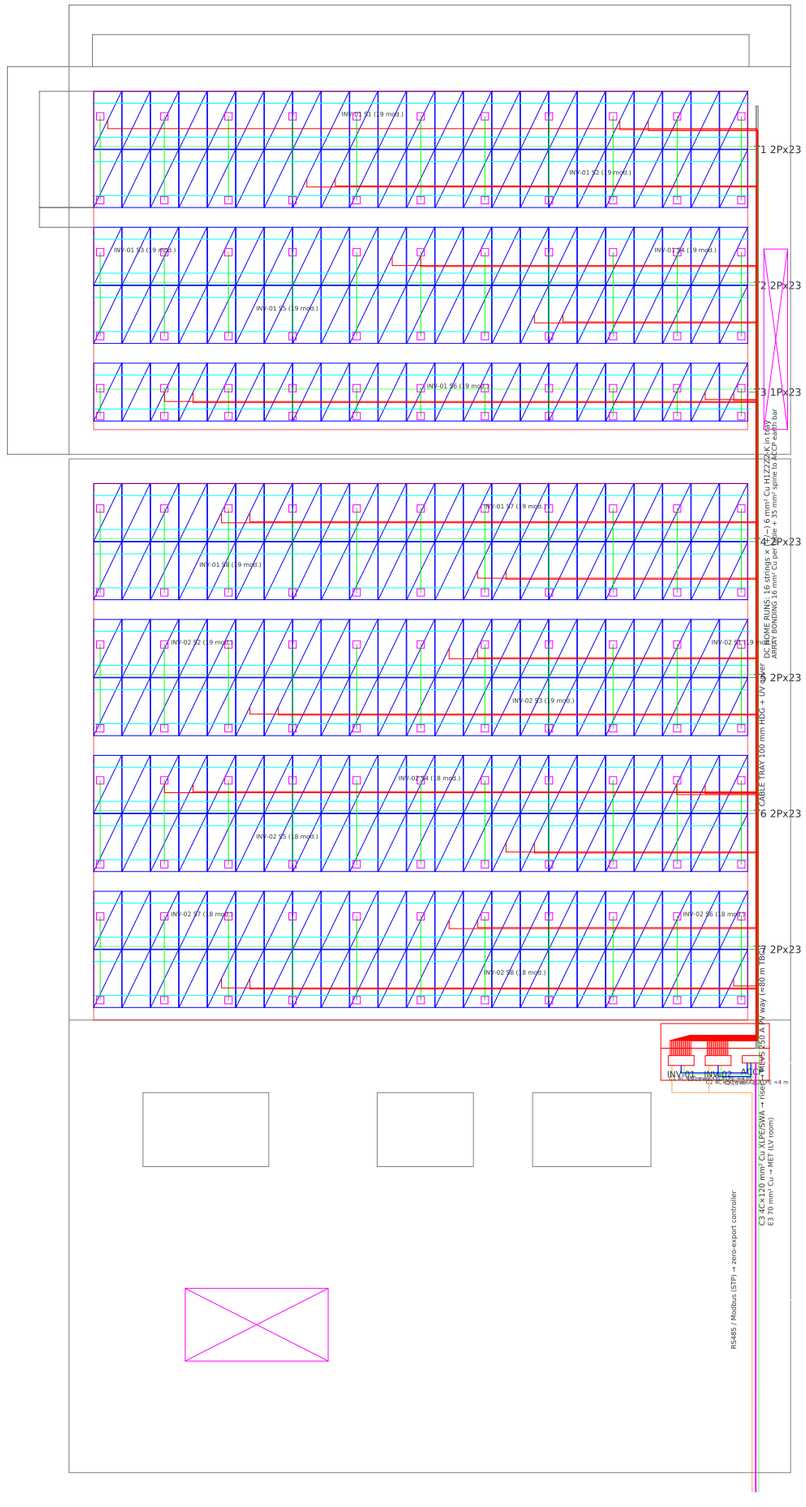

ROOFTOP PV LAYOUT - ENERACK BALLAST STRUCTURE (EPJ-26110401 V1.0)

MODULE 2382x1134x30 mm, 620 Wp, portrait, TILT 10 deg, wind 35 m/s

2P TABLE: 2x23 modules, rails 4 x 26630 mm, 11 frames @2600, feet span 3402, front post 595

1P TABLE: 1x23 modules, rails 2 x 26630 mm, 11 frames @2600, feet span 1136, front post 200

BASE: 6 x 2P + 1 x 1P = 299 modules = 185.4 kWp

All tables within the architect's solar zone on D18102-DD-A-104.

INV-01 (80 kW): T1, T2, T3 + T4 top row + 14 modules = 152 modules, 8 strings x 19

INV-02 (80 kW): rest of T4 + T5-T7 = 147 modules, 3 x 19 + 5 x 18


Inverters + ACCP on shaded steel frame in the equipment strip (east end); DC tray along east corridor; C3 to riser TBC.

Foot blocks drawn 300x300 indicative - size/weight by Enerack. Origin 0,0 = inner NW corner of upper roof.

Layers: PV-MODULE, PV-RAIL, PV-FRAME, PV-FOOT, PV-EQUIPMENT, PV-EXISTING, PV-OBSTRUCTION, PV-CABLE-TRAY, PV-CABLE-DC-STRING, PV-CABLE-DC-HOMERUN, PV-CABLE-AC-C1-C2, PV-CABLE-AC-C3, PV-CABLE-EARTH, PV-CABLE-COMMS, PV-CABLE-TAGS.

CABLE LAYOUT – CAD PLOT (cable layers highlighted)

Kampala Marriott Hotel – mezzanine roof · 185.4 kWp · plotted from PV_Layout_Enerack_10deg.dxf (units mm, origin = inner NW corner of upper roof) · NTS

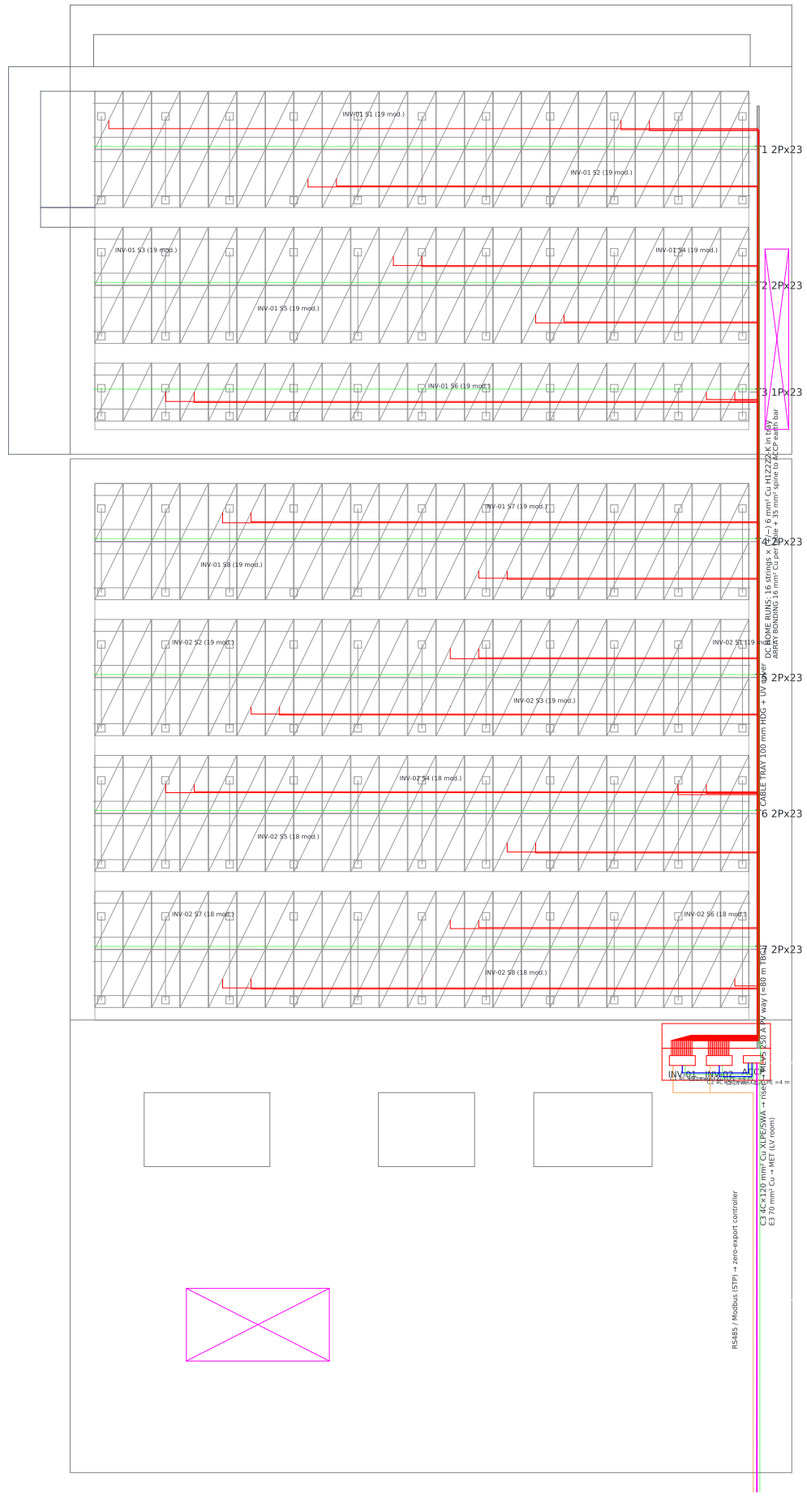

ROOFTOP PV LAYOUT - ENERACK BALLAST STRUCTURE (EPJ-26110401 V1.0)

MODULE 2382x1134x30 mm, 620 Wp, portrait, TILT 10 deg, wind 35 m/s

2P TABLE: 2x23 modules, rails 4 x 26630 mm, 11 frames @2600, feet span 3402, front post 595

1P TABLE: 1x23 modules, rails 2 x 26630 mm, 11 frames @2600, feet span 1136, front post 200

BASE: 6 x 2P + 1 x 1P = 299 modules = 185.4 kWp

All tables within the architect's solar zone on D18102-DD-A-104.

INV-01 (80 kW): T1, T2, T3 + T4 top row + 14 modules = 152 modules, 8 strings x 19

INV-02 (80 kW): rest of T4 + T5-T7 = 147 modules, 3 x 19 + 5 x 18

Inverters + ACCP on shaded steel frame in the equipment strip (east end); DC tray along east corridor; C3 to riser TBC.

Foot blocks drawn 300x300 indicative - size/weight by Enerack. Origin 0,0 = inner NW corner of upper roof.

PV-CABLE-TRAY
PV-CABLE-DC-HOMERUN
PV-CABLE-AC-C3
PV-CABLE-COMMS
PV-CABLE-DC-STRING
PV-CABLE-AC-C1-C2
PV-CABLE-EARTH
PV-CABLE-TAGS