

PLAN – PV LAYOUT ON MEZZANINE ROOF (ENERACK BALLAST STRUCTURE, 10° TILT)

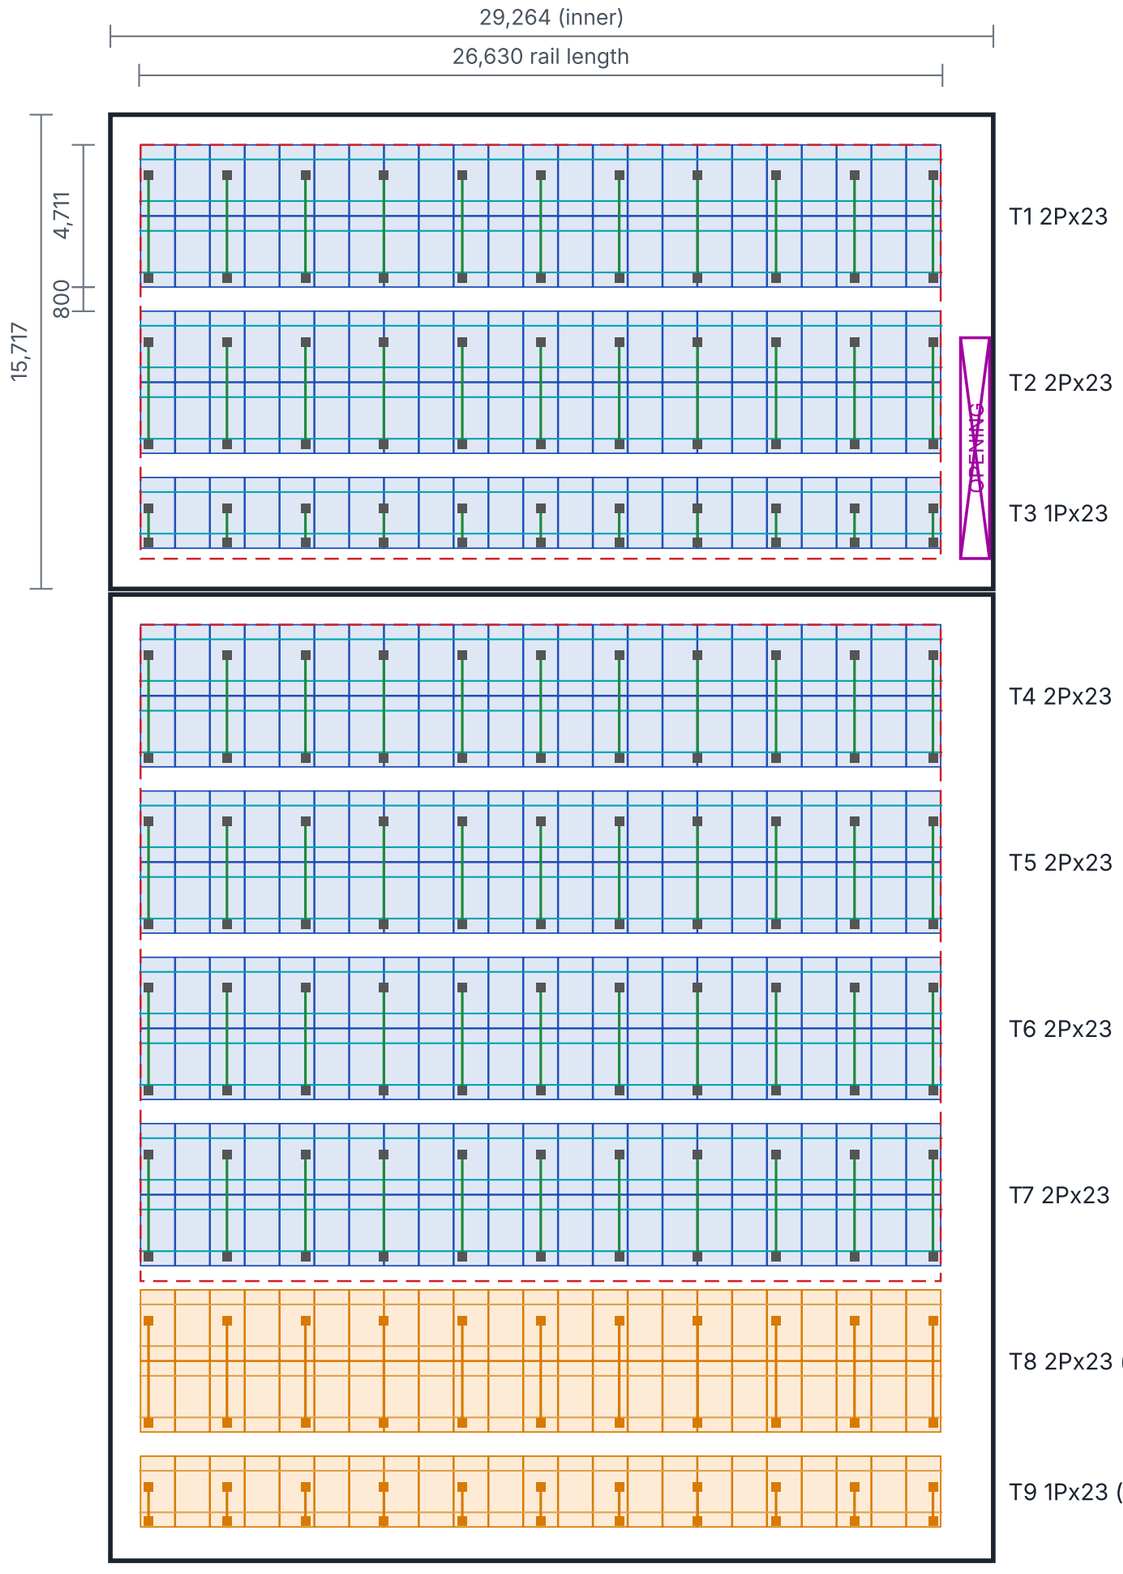

SECTION A – 2P TABLE (2 × 23 modules)

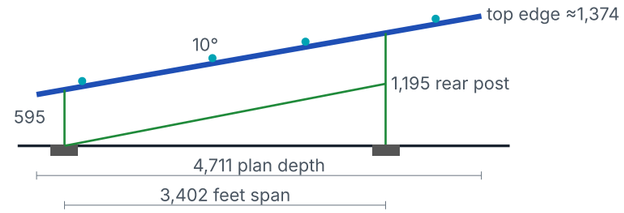

SECTION B – 1P TABLE (1 × 23 modules)

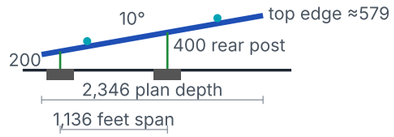


TABLE SCHEDULE

Table	Type	Modules	Frames	Rail lines
T1, T2, T4–T7	2P × 23	6 × 46 = 276	66	24
T3	1P × 23	23	11	2
BASE TOTAL		**299 (185.4 kWp)**	**77**	**26**
T8 (optional)	2P × 23	46	11	4
T9 (optional)	1P × 23	23	11	2
WITH OPTIONAL		**368 (228.2 kWp)**	**99**	**32**

DESIGN DATA

Module	620 Wp bifacial TOPCon, 2382 × 1134 × 30 mm
Structure	Enerack ballast, dwg EPJ-26110401 V1.0
Tilt / wind / snow	10° / 35 m/s / 0 kN/m²
Rails	R80, 8 × 3000 + 2630 = 26,630 mm per line
Frames	11 per table: first at 315, then 10 × 2,600
Spacing	20 mm module gap · 800 mm aisle · ≥ 950 mm rail to wall

LEGEND

Module (base) · Optional table
Rail · Frame / post · Foot block (300 × 300 indicative)
Setback line · Obstruction

NOTES: 1. Dimensions in mm. 2. Roof outline traced from D18102-DD-A-104; verify on site. 3. Foot block size and ballast weight per Enerack calculation; roof load to be approved by the building structural engineer. 4. Optional tables T8–T9 subject to confirmation that the area is open roof.

ROOFTOP SOLAR PV LAYOUT

Project	Marriott Hotel – Mezzanine Roof
Client	Tororo PV Power Company Limited
Drawing No.	PV-LAY-D18102-002 Rev A
Date / Scale	4 November 2026 · NTS (A3)