

PLAN – PV LAYOUT, INVERTERS & ACCP ON MEZZANINE ROOF (ENERACK BALLAST, 10° TILT)

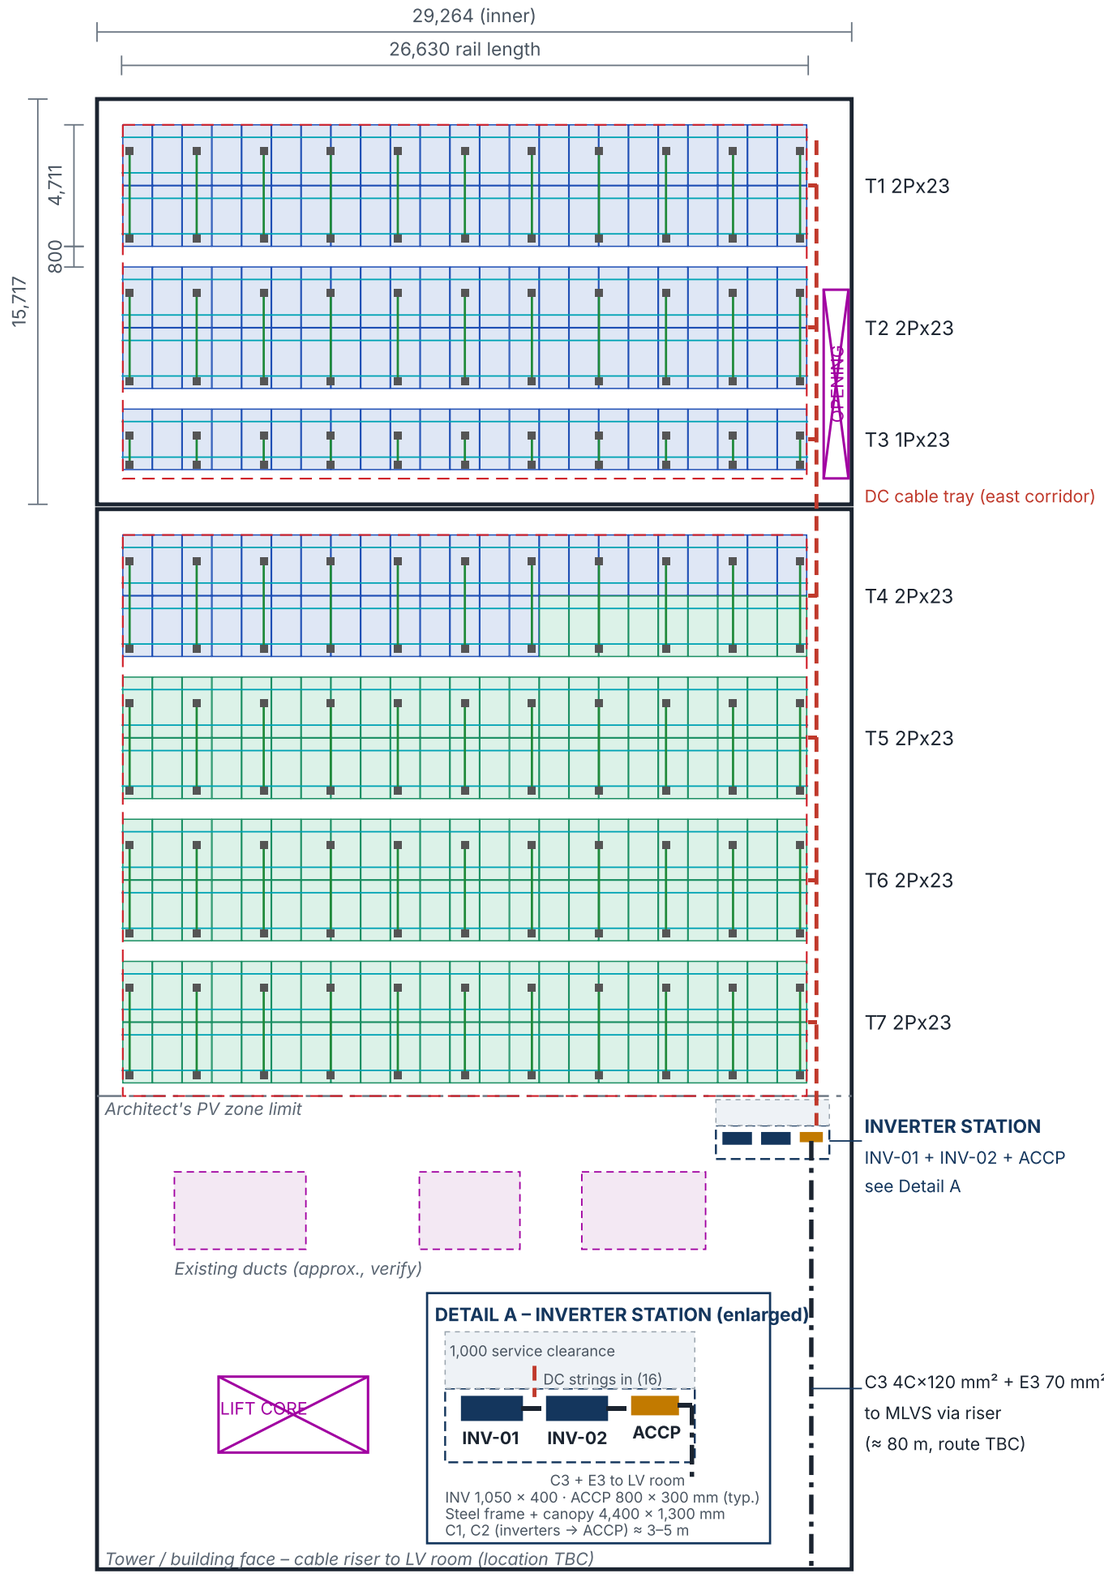

SECTION A – 2P TABLE (2 × 23 modules)

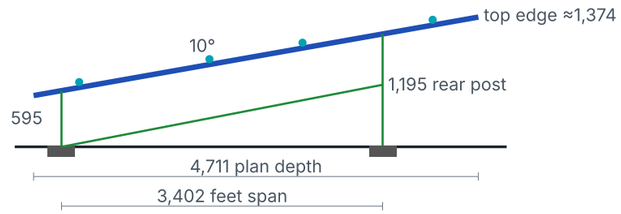

SECTION B – 1P TABLE (1 × 23 modules)

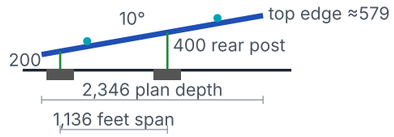


TABLE SCHEDULE

Table	Type	Modules	Inverter
T1, T2	2P × 23	92	INV-01
T3	1P × 23	23	INV-01
T4	2P × 23	46	INV-01: 37 · INV-02: 9
T5–T7	2P × 23	138	INV-02
TOTAL (77 frames, 26 rail lines)		**299**	**INV-01 152 · INV-02 147**

DESIGN DATA

Module	620 Wp bifacial TOPCon, 2382 × 1134 × 30 mm
Structure	Enerack ballast, dwg EPJ-26110401 V1.0
Tilt / wind / snow	10° / 35 m/s / 0 kN/m²
Rails	R80, 8 × 3000 + 2630 = 26,630 mm per line
Frames	11 per table: first at 315, then 10 × 2,600
Spacing	20 mm module gap · 800 mm aisle · ≥ 950 mm rail to wall

LEGEND

INV-01 modules · INV-02 modules · Inverter · ACCP
DC cable tray · C3 + E3 to LV room · Existing ducts
Rail · Frame / post · Foot block (300 × 300 indicative)
Setback line · Obstruction

NOTES: 1. Dimensions in mm. 2. Roof outline traced from D18102-DD-A-104; verify on site. 3. Foot block size and ballast weight per Enerack calculation; roof load to be approved by the building structural engineer. 4. All tables lie within the architect's solar zone. 5. Inverter station and duct positions indicative – confirm on site with the hotel; C3 riser route and LV room location TBC.

ROOFTOP SOLAR PV LAYOUT

Project	Marriott Hotel – Mezzanine Roof
Client	Tororo PV Power Company Limited
Drawing No.	PV-LAY-D18102-002 Rev B
Date / Scale	4 November 2026 · NTS (A3)