

TECHNICAL REPORT · ROAD TO GREEN

Rooftop Solar PV System
Design Basis & Cost Estimate

Marriott Hotel – Mezzanine Roof – Phase 1

Document No.	NILESUN POWER RF002
Revision	B – Updated costing and financials
Date	9 November 2026
Client	Kampala Marriott Hotel
System capacity	185.4 kWp DC / 160 kW AC, grid-tied

Prepared by NileSun Power Limited
2026.11.04

Document Control

Rev	Date	Description	Prepared	Checked	Approved
A	3/11/2026	Version A	Mahil Fernando	Prasanna Dissanayake	Manjula Perera

Reference documents

Reference	Title
D18102-DD-A-104	Mezzanine floor plan incl. roof PV zones (architect)
PV-LAY-D18102-002	PV layout with ballast structure, 10° tilt
EPJ-26110401 V1.0	Mounting structure drawings (2P and 1P tables)

Contents

Contents

Reference documents....2
Contents....2
1. Executive Summary....3
Key findings....3
Recommendation....3
2. Site and Design Basis....4
2.1 Site and load....4
3.Estimation PV Solar Generation....5
4. Solar Impact on Time-of-Use Tariff....5
3.PV Array Layout....6
4. Electrical Design....7
4.1 Configuration....7
4.3 Single-line arrangement....7
5 Cost Estimate (Bill of Quantities)....8
7. Financial Analysis....8
Tariff sensitivity....9
Annual cash flow (selected years, USD)....9
8. Expansion Options....10
9. Assumptions, Exclusions and Next Steps....10
9.1 Key assumptions....10
9.2 Exclusions....10

1. Executive Summary

This report sets out the design basis, layout, energy yield and budget cost for a grid-tied rooftop solar photovoltaic (PV) system on the mezzanine-level roof of the Marriott Hotel,

The system has no battery storage and supplies the hotel's own load behind the utility meter.

185.4 kWp	291 MWh	USD 103k	3.9 yrs
DC capacity (299 × 620 Wp)	Year-1 generation	Total project cost (0.55 USD/Wp)	Simple payback

Key findings

From Energy audit and feasibility study key findings.

Item	Value
Roof area (mezzanine roof)	1,150 m² (Available area for solar installation)
Plant capacity	185.4 kWp
Modules	299 × 620 Wp (13 rows of 23 solar modules)
Structure	Fixed-tilt ballast structure, 10°
Inverters	2 × 80 kW (160 kW AC)
Hotel consumption	981,901 kWh/month (UEDCL bill, Oct 2026)
Self-consumption	100% (no export, no battery)
Year-1 generation	291 MWh (2.5% of annual consumption) – PVsyst P50
Avoided tariff	USD 0.0893/kWh (UGX 357/kWh shoulder tariff, as billed)
Year-1 savings	USD 25,976
Total project cost	USD 102,789
Simple payback	3.9 years
Project IRR	26.6%
NPV (25 years at 10%)	USD 161,408
Cost of solar energy (LCOE)	0.040 USD/kWh
Road to 500 kWp	315 kWp, needs other roofs or car-park canopies

Table 1: Summary of Energy Audit Finding & Recommended PV Solar Installation

Recommendation

Phase 1: Proceed with the 185.4 kWp mezzanine roof system.

Phase 2: Proceed with 250.4 kWp the car park

2. Site and Design Basis

2.1 Site and load


Facility	Marriott Hotel –PV on the mezzanine-level roof
Location	0°18'11.34"N, 32°35'13.76"E
Roof	Flat reinforced-concrete slab, single level, with parapet.
Annual electricity consumption	11,782,812 kWh (October 2026 bill × 12)
Average monthly energy consumption	981,901 kWh (UEDCL bill, 01/10–01/11/2026)
Average / daytime demand	≈ 1,348 kW average in the shoulder band; maximum demand 1,836 kW
Grid connection	Behind-the-meter, LV main switchboard
Energy storage	None



Figure 1: PV module installation on the mezzanine roof (AI Generated)

3. Estimation of PV Solar Generation

- Year-1 generation 291,051 kWh, on average 24,254 kWh/month and 797 kWh/day
- 25-year generation 6,871 MWh*
- share of hotel uses 100 %, 2.5 % of annual consumption

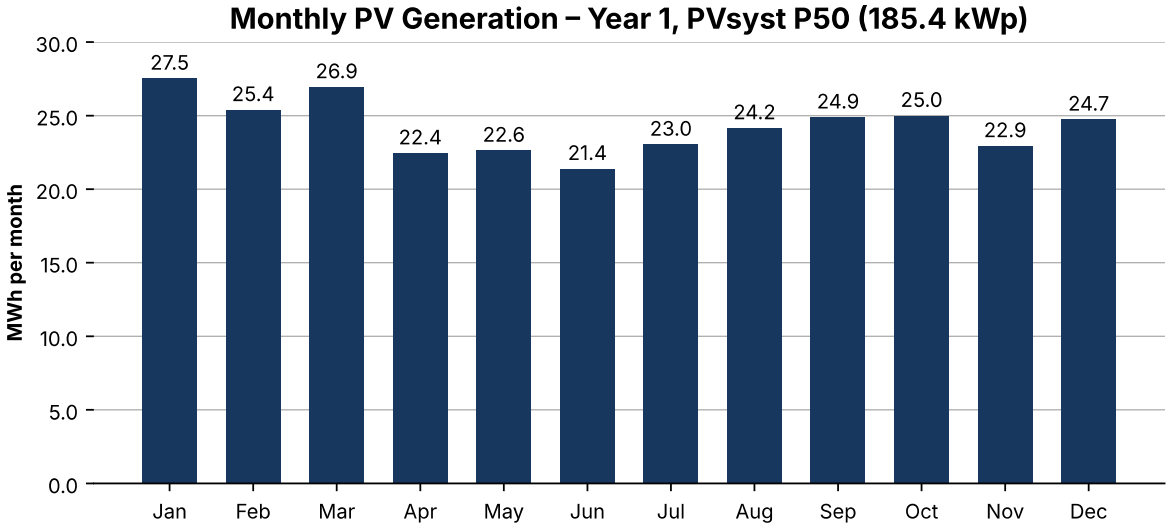

*1.0 % degradation in year 1, then 0.4 %/yr

Source: PVsyst V8.1.8 simulation (P50, Meteonorm 9.0 weather, performance ratio 85.4 %, specific yield 1,570 kWh/kWp) – Annex 7. Output is highest from January to March and lowest in June.
The best month is about 29 % above the lowest. The hotel load is higher than the PV output in every hour, so all this energy is used on site. Figures are P50 as simulated, before shading and soiling losses (P90 ≈ 8 % lower).

4. Solar Impact on Time-of-Use Tariff

The hotel is billed on a time-of-use (TOU) tariff, so each kWh is worth a different amount depending on when it is used.

Tariff period	Hours	Tariff UGX/kWh → USD/kWh (UGX 4,000/USD)
Off-peak	00:00–06:00	286.5 → 0.0716
Shoulder	06:00–18:00	357.0 → 0.0893
Peak	18:00–24:00	428.8 → 0.1072

Table 2: UEDCL tariff 30.2 Large Consumers (bill Oct 2026), tariffs as billed excl. VAT, at UGX 4,000/USD


Period	Hotel use (kWh/yr)	Solar (MWh/yr)	Share of solar	Grid after solar (kWh/yr)	Reduction	Cost before (USD/yr)	Cost after (USD/yr)	Saving (USD/yr)
Off-peak	2,765	0.0	0.0%	2,765	0.00%	198,031	198,031	0
Shoulder	6,016	291.1	100.0%	5,725	4.84%	536,890	510,913	25,976
Peak	3,002	0.0	0.0%	3,002	0.00%	321,858	321,858	0
Total	**11,783**	**291.1**	**100.0%**	**11,492**	**2.47%**	**1,056,779**	**1,030,803**	**25,976**

Table 2 : Energy reduction percentage & cost saving per year


*Annual energy demand = UEDCL bill for October 2026 (981,901 kWh) × 12, split by tariff band as billed. All solar output (including the small output just after 18:00) is counted in the shoulder period. The demand charge (UGX 11,096/kW) is not reduced by solar.

5. PV Array Layout

Each row holds 23 modules on Enerack R80 rails 26,630 mm long, supported by 11 frames per table at 2,600 mm centers. The upper block carries two 2P tables and one 1P table; the lower block carries four 2P tables.

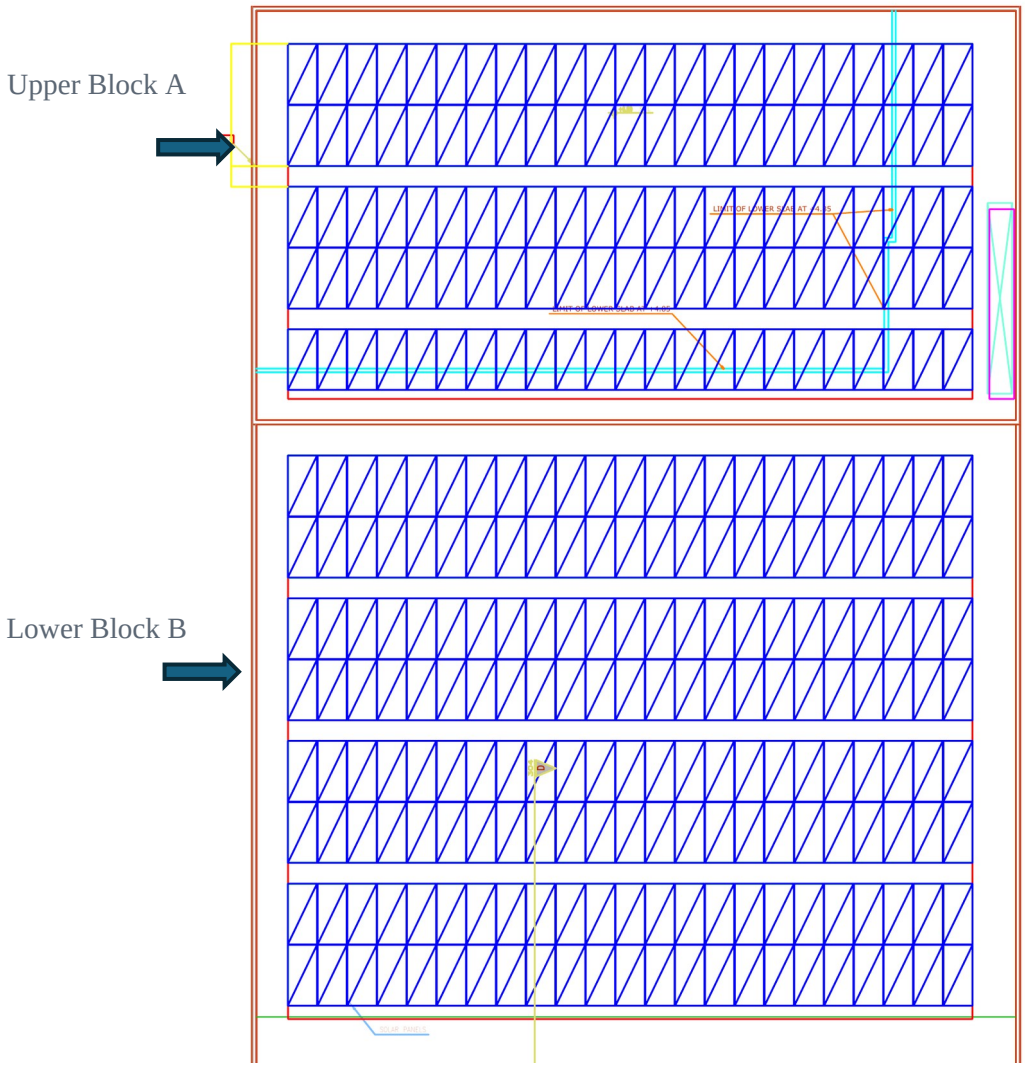

Zone	Tables	Rows	Modules	kWp
Upper block A	2 × 2P + 1 × 1P	5	115	71.3
Lower block B	4 × 2P	8	184	114.1
Total	**7 tables**	**13**	**299**	**185.4**

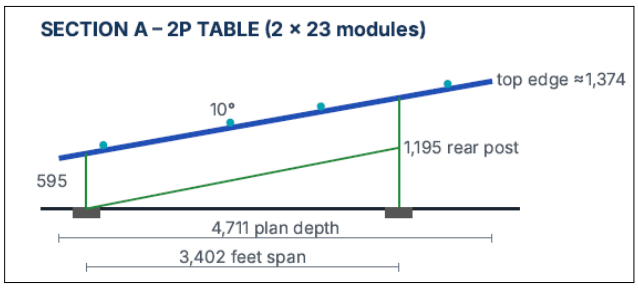

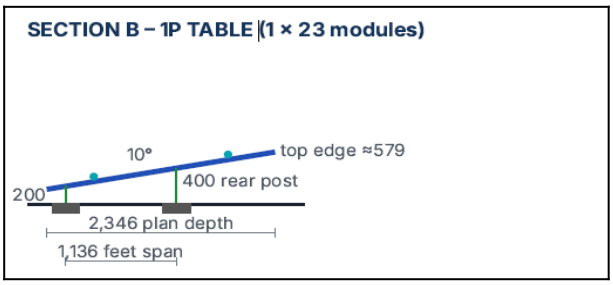


Figure 3 : PV Layout and Table Structure details,

6. Electrical Design

6.1 Configuration

Item	Inverter INV-01	Inverter INV-02	Total
Rated AC power	80 kW	80 kW	160 kW
Strings	8 × 19 modules	3 × 19 + 5 × 18 modules	16 strings
Modules	152	147	299
DC capacity	94.2 kWp	91.1 kWp	185.4 kWp
DC/AC ratio	1.18	1.14	1.16

Table 5: System Configuration & Inverter Capacity of each block

6.2 Single-line arrangement

1. PV strings: 4 mm² double-insulated PV cable through the cable trays, via a DC isolator and a Type II DC SPD for every string, to the inverters on the roof in a shaded, ventilated location.
2. Inverters (400 V, 3-phase) → AC combiner panel with 2 × 160 A MCCB incomers, Type II AC SPD and 400 A roof isolator.
3. AC combiner panel → 4C × 240 mm² Cu XLPE/SWA → existing Masterpact NW10 H1 (1000 A) solar incomer on the main LV switchboard.
4. Earthing: panel-to-panel bonding of the module frames, connected to the building earth and integrated with the lightning protection system.

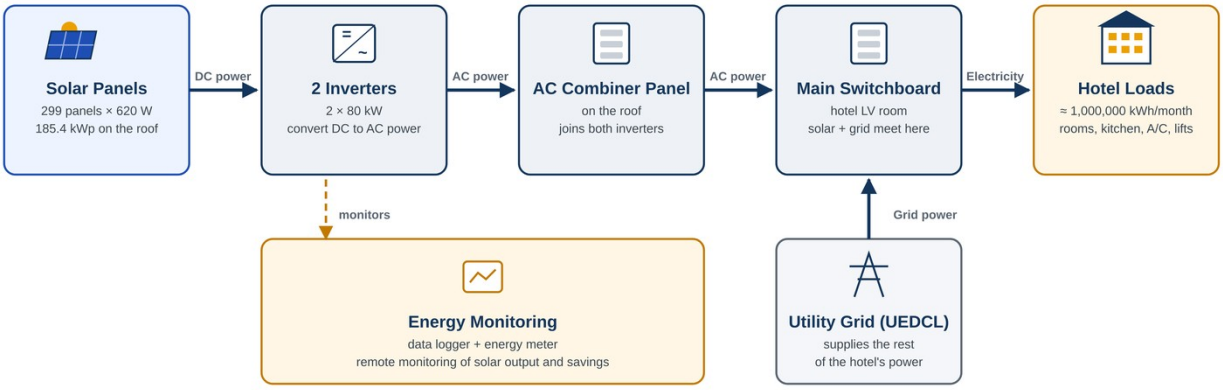


Figure 4 : Roof Top PV System Block Diagram

Component	Description	Size / Quantity
Solar panels	Generate DC electricity	299 × 620 W = 185.4 kWp
Inverters	Convert DC power to AC power	2 × 80 kW
AC combiner panel	Joins both inverter outputs on the roof	1 panel, 400 A
Main switchboard	Where solar and grid power meet (hotel LV room)	Existing, 1000 A
Utility grid (UEDCL)	Supplies the rest of the hotel's electricity	Existing supply
Expected generation	Solar energy used by the hotel each year	291,000 kWh/yr (24,250 kWh/month)

Table 6 each item and in the block and Size/Quantity

7. Cost Estimate (Bill of Quantities)

No.	Description	Qty	Rate (USD)	Amount (USD)
1	Supply of PV modules, 620 Wp (299 Nos Modules)	185.4 kWp	0.185	34,378
2	Supply of String inverters, 80 kW	2 nos	4,000	8,000
3	Supply of Mounting structure per Wp	185.4 kWp	0.095	17,634
4	Supply of DC system	Lot	USD 0.029/Wp	5,376
5	Supply of AC system	Lot	Lump sum	6,245
6	Earthing, equipotential bonding & lightning protection integration	Lot	Lump sum	1,847
7	Installation, testing & commissioning	Lot	Lump sum	15,279
8	Transport, logistics & customs clearing	Lot	Lump sum	8,650
	Sub-total			97,409
	Contingency		7 %	**5,380**
	Total Project Value (excluding taxes)			**102,789**
	Specific cost			0.554 USD/Wp

Table 7: Project Cost Estimation

8. Financial Analysis

The solar system needs a total investment of USD 102,789 (total project value, excluding taxes). At the avoided shoulder tariff of USD 0.0893/kWh (UGX 357/kWh as billed, excl. VAT, at UGX 4,000/USD), rising 2% a year, it saves about USD 26.0k in its first year (PVsyst P50 generation).
The investment pays back in about 3.9 years. Over 25 years the project gives an IRR of 26.6% and an NPV of USD 161,408 at a 10% discount rate, with total savings of about USD 782,000.

Solar energy costs about USD 0.040/kWh, below the grid tariff, so every unit generated reduces the hotel's electricity cost. No O&M or inverter-replacement cost is included in the cash flow.

Total investment (excluding taxes)	USD 102,789
Avoided grid tariff (year 1) / escalation	USD 0.0893/kWh (shoulder) / 2 % per year
Year-1 savings	USD 25,976
Simple payback	3.9 years
Project IRR (25 years, unlevered)	26.6 %
NPV at 10 % discount rate	USD 161,408
Levelized cost of energy (LCOE)	USD 0.040/kWh
25-year cumulative savings	USD 782,392

Table 8 : Financial Analysis

Tariff sensitivity

The base case uses the shoulder tariff from the October 2026 bill, UGX 357/kWh (USD 0.0893/kWh at UGX 4,000/USD). If the 40 % energy rebate shown on the bill is applied to the saved energy, the avoided cost falls to USD 0.0536/kWh; if VAT on electricity cannot be recovered it rises to USD 0.1053/kWh. Each USD 0.01/kWh change in the avoided tariff moves the NPV by about USD 29.6k. The break-even tariff (NPV = 0 at 10 %) is about USD 0.035/kWh, roughly 61 % below the current shoulder tariff.

Avoided tariff (USD/kWh)	Payback (yrs)	IRR	NPV 10 % (USD)
0.0536 (with 40 % rebate)	6.4	16.1%	55,729
0.0700	4.9	21.0%	104,424
0.0893 (base – bill tariff)	3.9	26.6%	161,408
0.1000	3.5	29.6%	193,230
0.1053 (VAT not recoverable)	3.3	31.1%	208,963

Table 9: Tariff Sensitivity

Annual cash flow (selected years, USD)

For an investment of USD 102,789, the system saves about USD 26.0k in its first year, rising with the tariff*. The investment is recovered in about 3.9 years, and over 25 years the hotel's cumulative net cash flow reaches USD 679,603.

Year	Generation (kWh)	Tariff (USD/kWh)	Savings	Net cash flow	Cumulative
0				(102,789)	(102,789)
1	291,051	0.089	25,976	25,976	(76,812)
2	286,988	0.091	26,126	26,126	(50,687)
3	285,840	0.093	26,542	26,542	(24,145)
4	284,697	0.095	26,964	26,964	2,820
5	283,558	0.097	27,394	27,394	30,213
6	**282,424**	**0.099**	**27,830**	**27,830**	**58,043**
7	**281,294**	**0.101**	**28,273**	**28,273**	**86,316**
8	**280,169**	**0.103**	**28,723**	**28,723**	**115,039**
9	**279,048**	**0.105**	**29,180**	**29,180**	**144,219**
10	**277,932**	**0.107**	**29,645**	**29,645**	**173,864**
12	**275,713**	**0.111**	**30,596**	**30,596**	**234,577**
15	**272,418**	**0.118**	**32,081**	**32,081**	**329,319**
18	**269,162**	**0.125**	**33,638**	**33,638**	**428,659**
20	**267,013**	**0.130**	**34,717**	**34,717**	**497,549**
25	**261,715**	**0.144**	**37,570**	**37,570**	**679,603**

Table 10: Annual Cash Flow

**Grid price saved for each kWh of solar. Starts at USD 0.089 (UGX 357/kWh shoulder tariff) and rises 2% a year to about USD 0.144 by year 25.*

9. Expansion Options

The target of about 500 kWp exceeds what the architect's solar zone on the mezzanine roof can hold. Because the hotel load is around ten times the PV output, every additional kWp would also be fully self-consumed, so expansion can be added in stages without a battery.

Option	Capacity	Year-1 energy	Budget cost (USD)	Remarks
Phase 1 – mezzanine roof (this report)	185.4 kWp	291 MWh	102,789	Ready for detailed design
Phase 2 – car-park solar canopies	250 kWp	370 MWh	187,500	Adds shaded parking; steel canopy cost
Indicative total	435 kWp	661 MWh	290,289	5.6 % of hotel consumption

10. Assumptions, Exclusions and Next Steps

Key assumptions

- The hotel used 981,901 kWh in October 2026 (UEDCL bill) with an average daytime demand of about 1,348 kW – far above the 160 kW PV output.
- The avoided tariff is the UEDCL shoulder tariff as billed, UGX 357/kWh ≈ USD 0.0893/kWh at UGX 4,000/USD (excl. VAT), escalating 2 %/yr. The bill also shows a 40 % energy rebate; if it is applied to the solar savings the value is USD 0.0536/kWh.
- Prices are 2026 East African market levels in USD, excluding taxes.
- Energy yield from the PVsyst V8.1.8 simulation, P50 as simulated (291,051 kWh/yr); shading and soiling are not yet modelled and a P90 year is about 8 % lower.

Exclusions

- Battery storage, diesel-generator synchronisation and export metering.
- Roof waterproofing renewal, structural strengthening, and civil works to the LV room.
- Utility network upgrades, permit fees and financing costs.

Annexes

1.Single Line Diagram
2.Layout Drawing
3.Data Sheets of Inverter
4.Data Sheet of Solar Module
5.Stuctrural Drawing
6.Quotation
7.PVsyst Simulation Report